



Instruction Manual

Submersible Aquarium Heater



The Aqueon® Aquarium Submersible Heaters are listed by Underwriters Laboratories to ensure that they meet the stringent U.S. and Canadian safety requirements.

Models: TA50H (50W), TA100H (100W),
TA150H (150W), TA200H (200W)
and TA300H (300W)
120 Volts, 60 Hz


IMPORTANT SAFETY INSTRUCTIONS

WARNING – To guard against injury, basic safety precautions should be observed, including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

DANGER – To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt to repair yourself; return the appliance to an authorized service facility for service or discard the appliance.

- A. If the appliance shows any sign of abnormal water leakage, immediately unplug it from the power source.
 - B. Carefully examine the appliance after installation. It should not be plugged in if there is water on the parts not intended to be wet.
 - C. Do not operate any appliance if it has a damaged cord or plug, if it is malfunctioning or if it is dropped or damaged in any manner.
 - D. To avoid the possibility of the appliance plug or receptacle getting wet, position aquarium stand and tank to one side of the wall mounted receptacle to prevent water from dripping onto the receptacle or plug. As shown in the figure below, a “drip loop” should be arranged by the user for each cord connecting an aquarium appliance to the receptacle. The “drip loop” is the part of the cord below the level of the receptacle, or the connector if an extension cord is used, to prevent water travel along the cord and coming in contact with the receptacle. If the plug or the receptacles do get wet, DON'T unplug the cord. Disconnect the fuse to the circuit breaker that supplies power to the appliance. Then unplug and examine for the presence of water in the receptacle.
2. Close supervision is necessary when any appliance is used by or near children.
3. To avoid injury, do not contact moving parts or hot parts such as heaters, reflectors, lamp bulbs, etc.
4. Always unplug an appliance from the outlet when not in use, before putting on or taking off parts, and before cleaning. Never yank the cord to pull plug from the outlet. Grasp the plug and pull to disconnect.
5. Do not use an appliance for other than intended use. The use of attachments not recommended or sold by the appliance manufacturer may cause an unsafe condition.
6. Do not install or store the appliance where it will be exposed to weather or temperatures below freezing.
7. Make sure an appliance mounted on a tank is securely installed before operating it.
8. Read and observe all the important notices on the appliance.
9. If an extension cord is necessary, a cord with a proper rating should be used. A cord rated for less amperes or watts than the appliance rating may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled.

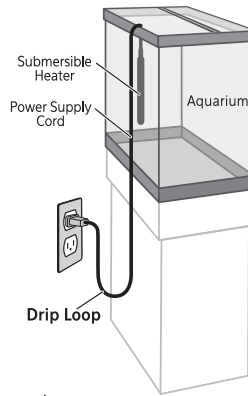

ONLY FOR POLARIZED ATTACHMENT PLUG APPLIANCES

10. If this appliance has a polarized plug (one blade is wider than the other) as a safety feature, this plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

SAVE THESE INSTRUCTIONS


CONSIGNES DE SÉCURITÉ IMPORTANTES

AVERTISSEMENT – Pour protéger contre les blessures, respecter les consignes de sécurité de base, notamment ce qui suit :

LIRE ET RESPECTER TOUTES LES INSTRUCTIONS DE SÉCURITÉ.

DANGER – Pour écarter les risques de décharge électrique, faire preuve de précautions particulières en raison de la présence d'eau dans l'aquarium. Dans chacune des situations ci-dessous, ne pas tenter de réparer soi-même ; renvoyer l'appareil à un centre de réparation agréé ou le mettre au rebut.

1. A. Si l'appareil présente des signes de fuites d'eau anormales, le débrancher immédiatement de la source d'alimentation.
B. Examiner l'appareil avec soin après son installation. Ne pas le brancher s'il y a de l'eau sur des pièces non destinées à être mouillées.
C. Ne pas utiliser un appareil s'il a un cordon ou une fiche endommagés, s'il fonctionne mal, s'il est tombé ou s'il a été endommagé d'une quelconque façon.
D. Pour écarter le risque de mouiller la fiche de l'appareil ou la prise de courant, placer le socle et la cuve de l'aquarium sur le côté par rapport à la prise murale, afin d'éviter que l'eau ne goutte sur la prise ou la fiche. Prévoir une « boucle d'égouttement », illustrée ci-dessous, sur chaque cordon qui raccorde un appareil de l'aquarium à la prise de courant. La « boucle d'égouttement » est la portion de cordon en dessous du niveau de la prise, ou du connecteur si un cordon de rallonge est utilisé, pour empêcher l'eau de s'écouler le long du cordon et de venir au contact de la prise. Si la fiche ou la prise sont mouillées, NE PAS débrancher le cordon. Couper l'électricité au niveau du disjoncteur qui alimente l'appareil. Débrancher ensuite le cordon et voir s'il y a de l'eau dans la prise de courant.
2. Une supervision étroite est nécessaire lors de l'utilisation de tout appareil électrique par des enfants ou à leur proximité.
3. Pour éviter les blessures, ne pas toucher de pièces en mouvement ni de pièces chaudes telles que radiateurs, réflecteurs, ampoules, etc.
4. Toujours débrancher un appareil de la prise de courant lorsqu'il n'est pas utilisé, avant de poser ou d'enlever des pièces et avant de le nettoyer. Ne jamais tirer sur le cordon pour sortir la fiche de la prise. Saisir la fiche et tirer pour débrancher.
5. Ne pas utiliser un appareil à d'autres fins que celles prévues. L'emploi d'accessoires non recommandés ni vendus par le fabricant de l'appareil peut produire une situation dangereuse.
6. Ne pas installer ni entreposer l'appareil dans un endroit exposé aux intempéries ou à des températures inférieures au gel.
7. S'assurer qu'un appareil monté sur un aquarium est solidement installé avant de le mettre en marche.
8. Lire et respecter toutes les consignes importantes figurant sur l'appareil.
9. Si un cordon de rallonge est nécessaire, utiliser un cordon de capacité suffisante. Un cordon prévu pour des intensités (A) ou des puissances (W) inférieures à celles de l'appareil peut surchauffer. Veiller à disposer le cordon de manière à éviter tout risque de trébuchement ou d'arrachement.

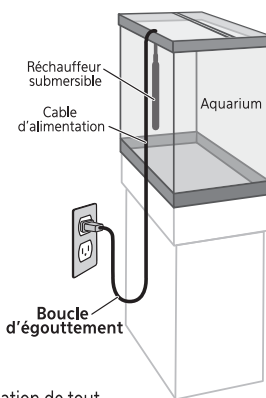

APPAREILS À FICHE POLARISÉE SEULEMENT

10. Si cet appareil comporte une fiche polarisée (une lame plus large que l'autre) par mesure de sécurité, cette fiche ne peut être branchée dans une prise polarisée que dans un sens. Si la fiche ne rentre pas complètement dans la prise, retourner la fiche. Si elle ne rentre toujours pas, contacter un électricien qualifié. Ne jamais utiliser avec un cordon de rallonge si la fiche ne s'enfonce pas complètement. Ne pas tenter de contourner ce dispositif de sécurité.

CONSERVER CES INSTRUCTIONS

SAFETY STANDARDS:

- This appliance is intended for indoor household use only.
- ALWAYS disconnect all immersed electrical equipment from power source before placing hands in water.
- ALWAYS maintain adequate water levels as stated in "SET-UP."
- DO NOT use product if either the cord or the product appear damaged.
- DO NOT operate or leave product plugged-in when outside of water.
- DO NOT operate the heater without the rubber guard on the bottom of the heater.

TROUBLESHOOTING PROBLEMS

If problems are encountered:

If the appliance has been installed for 24 hours or more, and the temperature of the water is still much lower than the required temperature, proceed as follows:

- Be sure to use a quality, accurate thermometer to monitor water temperature.
- Make sure that the temperature has been set to the correct value.
- Make sure that the appliance is plugged in and is receiving power.
- Make sure that the appliance is submerged at least to the minimum water level line.
- Make sure the water circulation around the appliance is adequate.
- Make sure that the volume of the aquarium falls within the range indicated on the label attached to the appliance.
- Make sure that the glass is not covered with lime scale. If necessary, remove scale after the appliance has been unplugged.

If the temperature is too high, after the appliance has been working for 24 hours or more, proceed as follows:

- Make sure that the temperature has been set to the correct value.
- Check whether too much water has evaporated, consequently reducing the volume to such an extent that it no longer falls within the range given on the label. If this is the case, add water immediately.

Limited Lifetime Warranty

WHAT THE WARRANTY COVERS:

Central Aquatics (Company) warrants this product (see Exclusions below) to the original purchaser against defective material and workmanship that occurs during normal in-home use for the life of the product. Company will, at Company's option, either repair or replace same without charge (but no cash refunds will be made). This warranty is limited to replacement or repair of product only and does not cover loss of aquarium life, personal injury, property loss, or damage arising from the use of the product.

EXCLUSIONS:

1. Damage resulting from accident, misuse, abuse, lack of reasonable care, subjecting the product to any but the specified electrical service, other than normal and ordinary use of the product, subjecting the product to abnormal working conditions or any other failure not resulting from defects in materials or workmanship.
2. Damage resulting from modification, tampering with or attempted repair by anyone other than the Company.
3. Transfer of product to someone other than the original consumer purchaser.
4. The warranty is not valid for components subject to wear.

FOR WARRANTY OR TECHNICAL SERVICE:

1. Contact the Company by mail or telephone: Central Aquatics, 5401 West Oakwood Park Drive, Franklin, WI 53132. Telephone: (888) 255-4527 to obtain a return authorization number.

NOTE: Be sure to provide contact information when requesting return authorization number.

2. Deliver, mail or ship the product, together with a copy of the original bill of sale, to: Central Aquatics, 5401 West Oakwood Park Drive, Franklin, WI 53132

You must pay any postage, shipping charges, insurance costs and other expenses to return the product to Central Aquatics, Franklin, WI 53132. However, if the necessary repairs are covered by the warranty, Company will pay the return shipping charges to any destination within the United States or Canada.

LIMITATION OF IMPLIED WARRANTIES AND EXCLUSION OF CERTAIN DAMAGES: THE COMPANY DISCLAIMS LIABILITY FOR INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, WITH RESPECT TO THIS PRODUCT. THIS WRITING CONSTITUTES THE ENTIRE AGREEMENT OF THE PARTIES WITH RESPECT TO THE SUBJECT MATTER HEREOF; NO WAIVER OR AMENDMENT SHALL BE VALID UNLESS IN WRITING SIGNED BY THE COMPANY.

Some states do not allow the exclusion or limitation of consequential damages, so the above limitation or exclusion may not apply to you.

Installation & Set-up Guide

CAUTION: Before working with or installing heater, be sure to read and understand all safety instructions and warnings.

Step 1:

Attach suction cups: Attach suction cups (D) to heater. Attaching both suction cups will ensure proper positioning in your aquarium and allow adequate water circulation around the heater for even heat distribution. Suction cups should only be placed over the label portion of the heater as shown in FIG 1.

Note: DO NOT place suction cups over the heating element portion of the heater.

Step 2:

Set heater temperature: In order to set the temperature, turn the adjustment knob (A) to the required temperature value stated on the graduated scale, located on the top of heater, as shown in FIG 2.

Step 3:

Heater installation: Install heater in water-filled aquarium. The heater works best when installed in the aquarium in the vertical position. The installation of the heater in this position requires that the aquarium must maintain a water level ABOVE the minimum water level line (B) on the heater, as shown in FIG 3. The heater can be installed in the aquarium in the horizontal position. The installation of the heater in this position requires that the heater be positioned fully submerged in water at all times, as shown in FIG 3.

Step 4:

Plug into electrical outlet: Allow for heater to be submerged in water for a minimum of 30 minutes prior to powering the appliance. Once heater has been mounted and submerged for 30 minutes, plug the appliance into an electrical outlet. Once plugged in, the heater will automatically start working. Should your water need heating, the indicator lamp (C) will illuminate showing that the heater is functioning and in heating mode.

Step 5:

Adjust temperature: Allow the heater to run for 24 hours at the original setting prior to adjusting. Check the aquarium water with a reliable thermometer. Should the heater need to be adjusted, simply turn the adjustment knob to the appropriate setting.

Note: DO NOT over adjust the heater, this may cause harm to your aquarium inhabitants and environment. Make sure of the required temperature for your specific setup.

CAUTION: NEVER operate heater without rubber protective guard (E).

Appliance Specification

Watts	Overall Length	Recommended Aquarium Size
50	9.0"	5-20
100	10.3"	15-40
150	13.0"	30-55
200	13.0"	50-75
300	15.0"	65-90

